

# Showmobile®

Showmobile® is an-all-in-one mobile performance system that creates a polished, high-profile performances environment for events of all kinds. The Showmobile features a full-scale, thrust-style stage with a cantilevered canopy and a state-of-the-art acoustical shell finished inside and outside. Set up and operation are simple and fast. When on site, the truck can unhitch and drive away.


- Wall surfaces are weather-resistant, acoustically reflective panels.
- Decks surfaces are weather-resistant, skid-free polyglass.
- Extruded aluminum channels on the roof and canopy form a continuous gutter system for moisture drainage. These channels create a watertight, dust-tight seal during transport.
- An Internal hydraulic system with wired remote deploys the stage and canopy which is leveled by jacks.
- A 12-volt battery powers the hydraulic system.
- A 110 VAC power center connects to an external 120 VAC power source and supplies fluorescent lighting and electrical outlets.
- Lockable storage compartments permit packing auxiliary equipment such as power cords, staging accessories, sound equipment, and other necessities.
- The roof and canopy can be lowered to the closed position and side doors closed and locked with the stage deck fully deployed.
- Stage extensions, stairs, decorative skirts, and stage equipment can be left in place, protected from weather and vandals, and ready for the next performance.
- Five-year warranty.
- Environmental attributes and LEED compliance for this product can be found at [www.wengercorp.com/GREEN](http://www.wengercorp.com/GREEN) or by contacting your Wenger representative.

### Intended Use


- Showmobile is intended to be set up inside or outside in all weather conditions.
- Showmobile can be towed at highways speeds on all roads and can be set up on any level surface.

### Performance Dimensions

|  |                                |
|--|--------------------------------|
| Main stage   | .....28' x 6' 6" (8.5 m x 2 m) |
| Hydraulic stage                                      | .....28' x 8' (8.5 m x 2.4 m)  |
| Overall stage depth                                  | .....14' 6" (4.4 m)            |
| Stage height from ground                             | .....3' 6" (1.07 m)            |
| Canopy height at highest setting from stage surface  | .....17' 4" (5.3 m)            |
| Canopy height at highest setting from ground surface | .....20' 10" (6.4 m)           |
| Upstage canopy height from stage surface             | .....9' 3" (2.8 m)             |
| Overall overhead canopy depth                        | .....13' 2" (4 m)              |

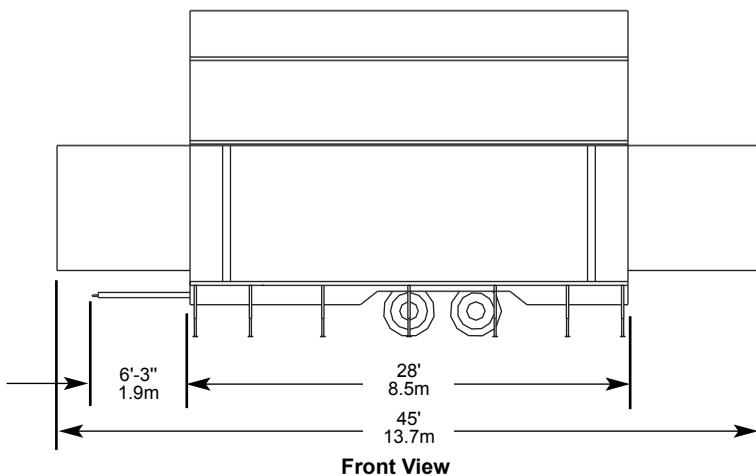


Front View

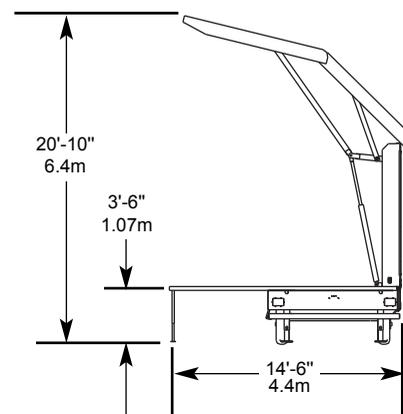

End View

### Travel Dimensions

|                        |                    |
|------------------------|--------------------|
| Length including hitch | .....33' 8" (10 m) |
| Body length            | .....28' (6.5 m)   |
| Width                  | .....8' 5" (2.6 m) |
| Height                 | .....13' 3" (4 m)  |

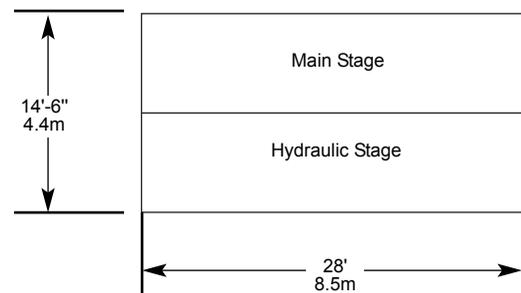

Top View

## Standard Equipment


- Manual leveling jacks with two removable cranks.
- End doors open for easy access and serve as side-stage adjustable sound reflectors.
- Hydraulic deployment of canopy and stage with wired remote control module.
- Built-in overhead fluorescent lighting.
- An electrical power center with a lockable door for 110 VAC circuits.
- A 12-volt battery and charger to power the hydraulic system.
- Two storage compartments built-in into the curb-side, below-stage level.
- Duplex electrical outlets, four on-stage and one near the battery for charging.
- A 110-volt power cable, 50 feet long (15.2m).
- Eight on-stage tie-downs with four tie-down straps.
- One adjustable all-terrain stairway with hand rail.
- Pintle hitch coupler.
- G-rated tubeless radial tires.

## Optional Upgrades

- Custom graphics with logo or other designs.
- Electrical upgrade with 220-volt power cable, four duplex outlets on the canopy, two duplex outlets on the back wall, and an additional load center.
- Four hydraulic leveling jacks with a wireless remote control and auto-level system.
- Low profile, curb-side disability lift.

## Accessories

- Versalite® Platform stage extensions are available to extend the stage on each side and on the front. Sizes of 16' x 40' (4.9 m x 12.2 m), 24' x 40' (6.1 m x 12.2 m), or 20' x 40' (7.3 m x 12.2 m) can be created as well as other configurations. The extensions include platforms, adjustable legs, and all connectors.
- Stage railings can be added to Versalite stage extensions.
- Stage skirting is available in 25 colors.
- Additional stairways can be attached anywhere on the stage perimeter.
- Audio system is available for professional quality sound — ASM231.
- Incandescent show lights. Packages feature light bars, fixtures, lamps, gel frames and gels. Packages require the electrical upgrade.
- Portable generator for 110 VAC power where electrical service is not available.

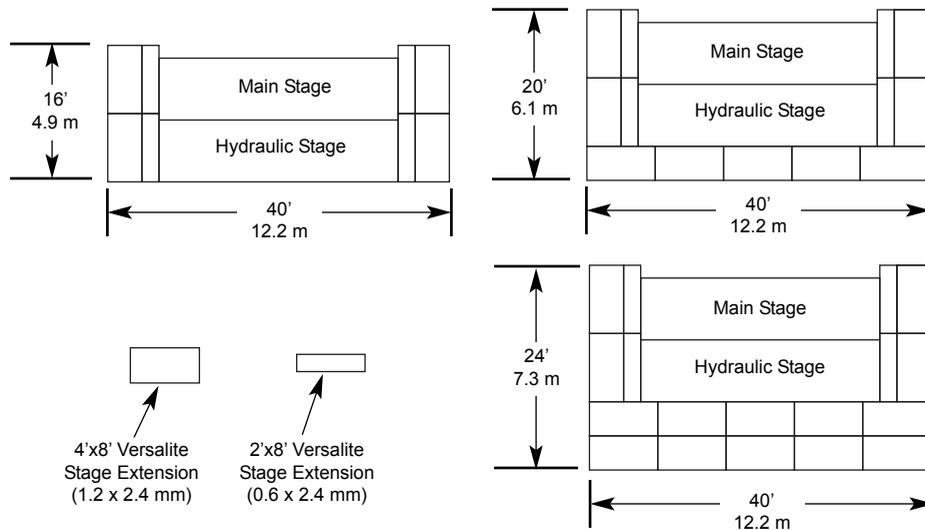

Optional Versalite Stage Extensions

### WENGER CORPORATION

555 Park Drive, PO Box 448  
Owatonna, MN 55060-0448  
Phone 800.4WENGER (493.6437)  
Fax 507.455.4258  
Customer Service 800.887.7145

### WENGER CORPORATION

CANADIAN REPRESENTATIVE OFFICE  
Phone 800.268.0148

### WORLDWIDE

Phone 507.455.4100  
Fax 507.774.8576

### WEB SITE

wengercorp.com

**Wenger®**

Your Performance Partner